


Intra Ox Sterile Handoff Workflow

Non Sterile Nurse

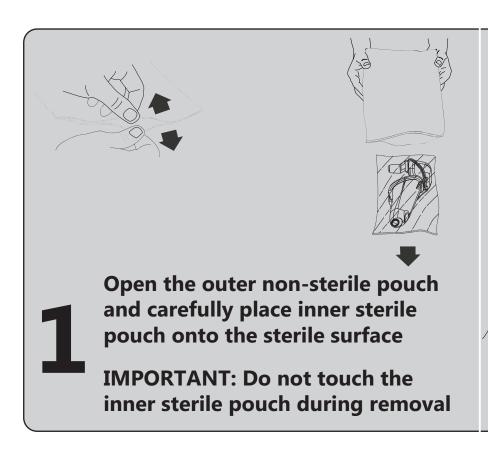




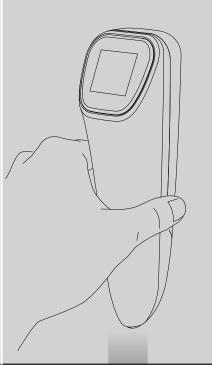



Carefully insert the IntraOx device with battery into the sterile open sheath.

IMPORTANT: Do not contact the outside of the sheath during insertion



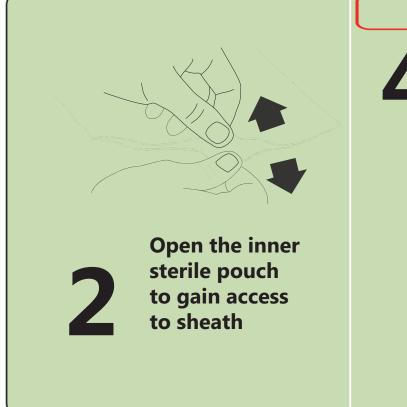

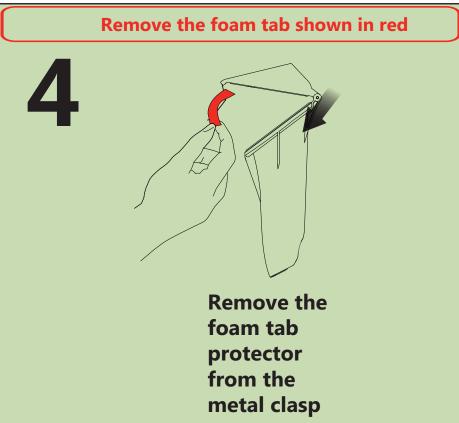


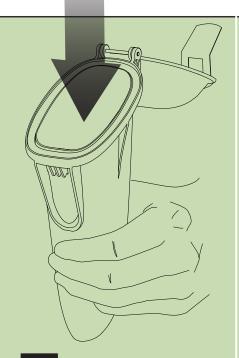



for next steps.



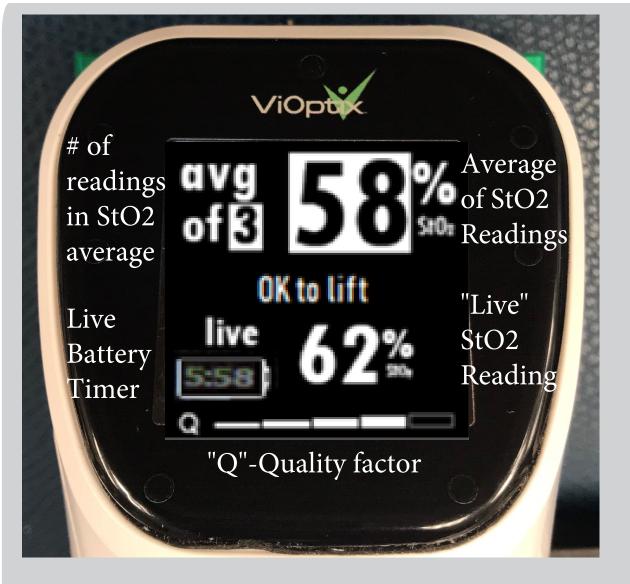

Time- Need to leave the device on tissue at least 5 seconds to stabilize reading

Pressure- Rest the tip of the device on the tissue (pressing too hard will blanch the tissue)

Quality- the "Q" factor should be 4-5 bars

Light- must turn the OR lights away to avoid wash out



See IFU (instructions for use) for additional information. IFU can be located on the ViOptix website: https://www.vioptix.com/resource-center/

Cleaning Instructions

After removing the battery pack, the re-usable main unit component requires preparation to get ready for the next procedure.

5.5.2 Preparing the re-usable main unit component for the next procedure

After the procedure, the re-usable main unit component should be cleaned and disinfected using an approved wipe from the list below. First, use a wipe to clean the device, removing any visible debris from the surfaces of the re-usable main unit component. Then, using additional wipes, disinfect all device surfaces by ensuring all surfaces are wet for the requisite disinfection time of 3 minutes per manufacturer's instructions. After the disinfection time, allow the device to dry for at least 10 minutes prior to use.

Approved wipes:

- CaviWipesTM
- Sani-Cloth® AF3 Germicidal Disposable Wipes

